
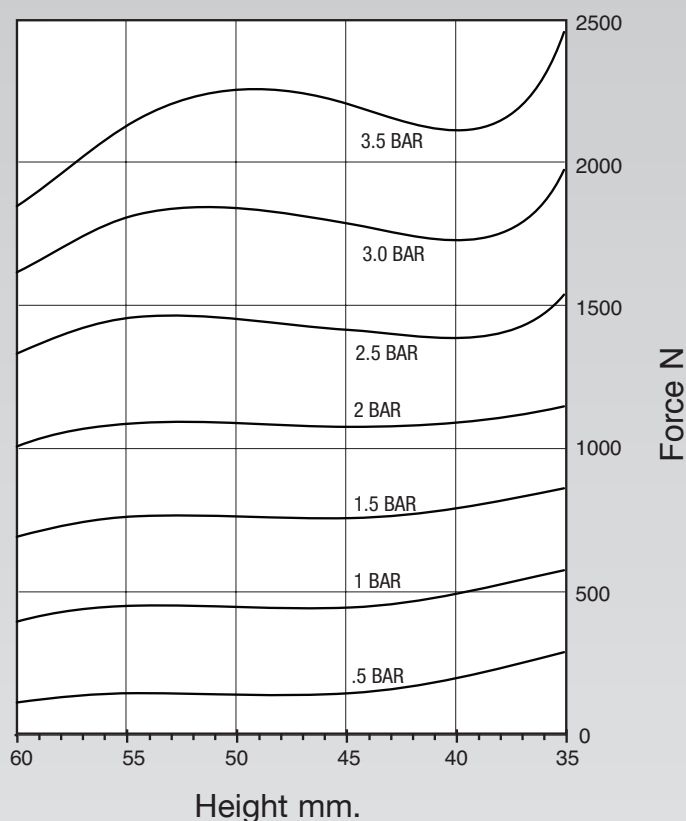


| Description | Assembly Order No. |
|-------------|--------------------|
| 120-P-25    | WA1-358-5677       |

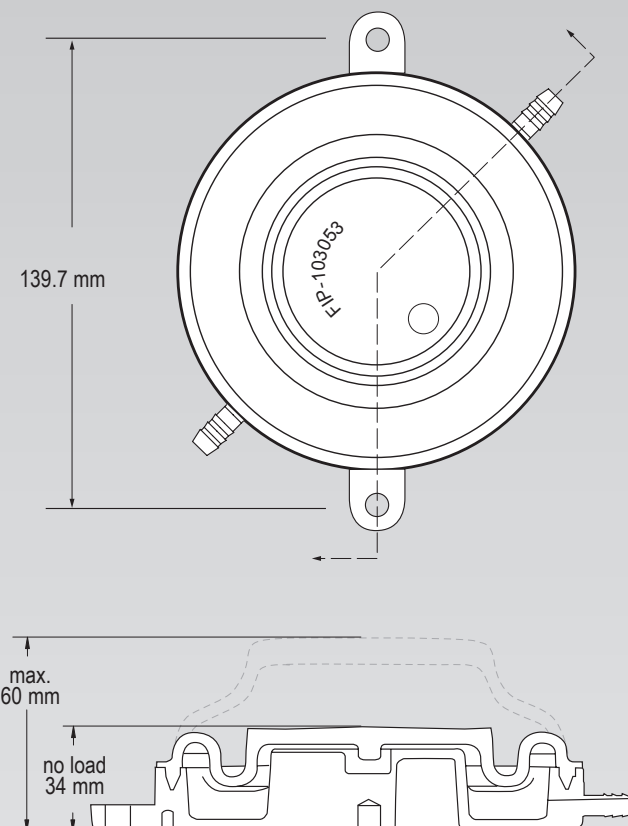

Use .25 in. or M6 screws to mount through tabs.

Use .25 in. [6.4] ID nylon or equivalent tubing.

## NOTE:

**Do not use as an Airmount isolator.**

**Force Table (Use for Airstroke™ actuator design)**

| Assembly Height (mm) | Volume @ 3.5 BAR (cu cm) | N Force |       |         |       |         |       |         |
|----------------------|--------------------------|---------|-------|---------|-------|---------|-------|---------|
|                      |                          | .5 BAR  | 1 BAR | 1.5 BAR | 2 BAR | 2.5 BAR | 3 BAR | 3.5 BAR |
| 34                   |                          | 269     | 576   | 883     | 1188  | 1603    | 2073  | 2584    |
| 37                   |                          | 210     | 522   | 835     | 1149  | 1469    | 1840  | 2264    |
| 39                   |                          | 163     | 478   | 796     | 1122  | 1453    | 1812  | 2200    |
| 42                   |                          | 131     | 451   | 775     | 1108  | 1457    | 1840  | 2257    |
| 44                   |                          | 110     | 435   | 765     | 1108  | 1469    | 1874  | 2322    |
| 47                   |                          | 103     | 433   | 767     | 1117  | 1488    | 1907  | 2374    |
| 50                   |                          | 104     | 435   | 770     | 1122  | 1506    | 1928  | 2383    |
| 52                   |                          | 113     | 442   | 777     | 1132  | 1524    | 1928  | 2336    |
| 55                   |                          | 116     | 441   | 773     | 1126  | 1515    | 1889  | 2242    |
| 57                   |                          | 108     | 425   | 749     | 1094  | 1471    | 1806  | 2091    |
| 60                   |                          | 75      | 381   | 695     | 1037  | 1384    | 1685  | 1936    |