
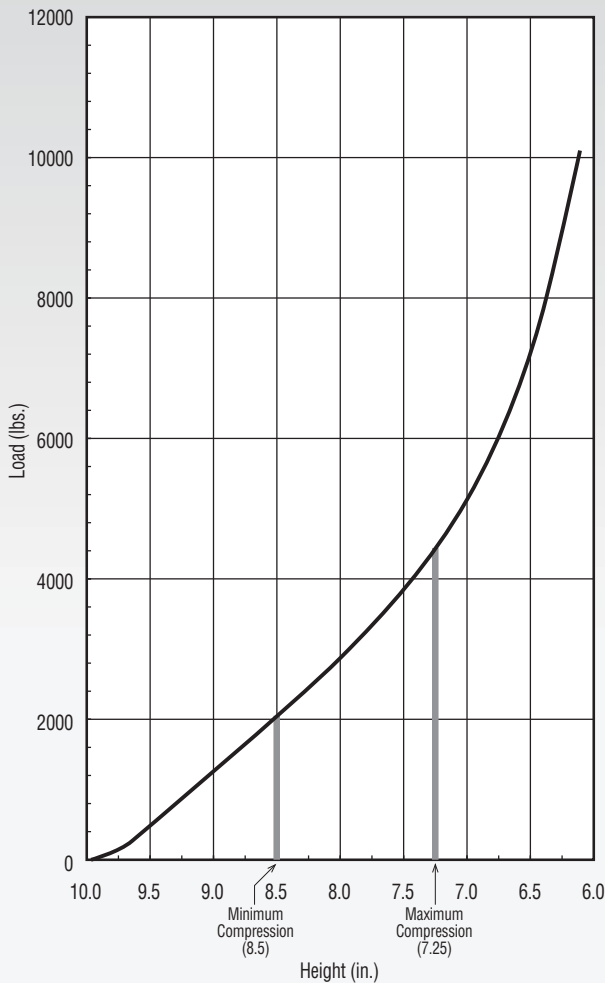


**IMPERIAL**

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (lbs.)</b>	1980	2870	3344	3830	4340
<b>Height (in.)</b>	8.5	8.0	7.8	7.5	7.3
<b>Rate (lbs./in.)</b>	1707	1857	1922	1983	2039
<b>Effective Deflection (in.)</b>	1.2	1.5	1.7	1.9	2.1
<b>Natural Freq. (CPM)</b>	175	151	143	135	129
<b>Maximum OD (in.)</b>	7.6				
<b>Weight (lbs.)</b>	9.84				

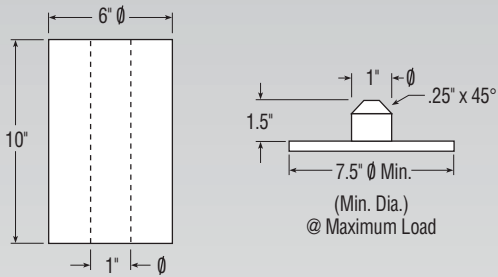

**METRIC**

<b>Compression (%)</b>	15.0	20.0	22.5	25.0	27.5
<b>Load (kN)</b>	8.80	12.76	14.84	17.02	19.29
<b>Height (mm)</b>	216	203	198	191	185
<b>Rate (kN/m)</b>	299	325	336	347	357
<b>Effective Deflection (mm)</b>	30	38	43	48	53
<b>Natural Freq. (Hz)</b>	2.92	2.52	2.38	2.25	2.15
<b>Maximum OD (mm)</b>	193				
<b>Weight (kg)</b>	4.48				

