


IMPERIAL

| Compression (%) | 15.0 | 20.0 | 22.5 | 25.0 | 27.5 |
|----------------------------|-------|-------|-------|-------|-------|
| Load (lbs.) | 2180 | 3060 | 3650 | 4100 | 4670 |
| Height (in.) | 6.8 | 6.4 | 6.2 | 6.0 | 5.8 |
| Rate (lbs./in.) | 2273 | 2448 | 2524 | 2594 | 2558 |
| Effective Deflection (in.) | 1.0 | 1.2 | 1.4 | 1.6 | 1.8 |
| Natural Freq. (CPM) | 192.0 | 168.2 | 156.3 | 150.0 | 142.0 |
| Maximum OD (in.) | 6.4 | 6.6 | 6.7 | 6.8 | 7.0 |
| Weight (lbs.) | 7.84 | | | | |

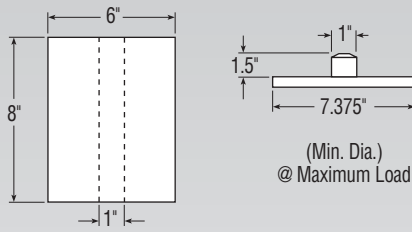

METRIC

| Compression (%) | 15.0 | 20.0 | 22.5 | 25.0 | 27.5 |
|---------------------------|------|-------|-------|-------|-------|
| Load (kN) | 9.69 | 13.60 | 16.22 | 18.22 | 20.76 |
| Height (mm) | 173 | 163 | 157 | 152 | 147 |
| Rate (kN/m) | 397 | 428 | 441 | 453 | 465 |
| Effective Deflection (mm) | 25 | 30 | 36 | 41 | 46 |
| Natural Freq. (Hz) | 3.20 | 2.80 | 2.61 | 2.50 | 2.37 |
| Maximum OD (mm) | 163 | 168 | 170 | 173 | 178 |
| Weight (kg) | 3.57 | | | | |

