


### IMPERIAL

| Compression (%)            | 15.0  | 20.0 | 22.5 | 25.0  | 27.5  |
|----------------------------|-------|------|------|-------|-------|
| Load (lbs.)                | 5200  | 7400 | 8600 | 10000 | 11400 |
| Height (in.)               | 6.8   | 6.4  | 6.2  | 6.0   | 5.8   |
| Rate (lbs./in.)            | 4893  | 5993 | 6486 | 6942  | 7359  |
| Effective Deflection (in.) | 1.1   | 1.2  | 1.3  | 1.4   | 1.5   |
| Natural Freq. (CPM)        | 182   | 169  | 163  | 157   | 151   |
| Maximum OD (in.)           | 9.50  | 9.78 | 9.90 | 10.08 | 10.24 |
| Weight (lbs.)              | 16.88 |      |      |       |       |

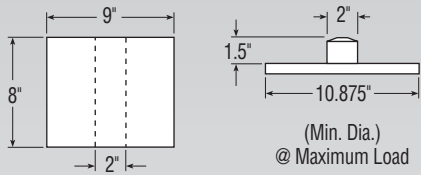

### METRIC

| Compression (%)           | 15.0  | 20.0  | 22.5  | 25.0  | 27.5  |
|---------------------------|-------|-------|-------|-------|-------|
| Load (kN)                 | 23.11 | 32.89 | 38.22 | 44.44 | 50.67 |
| Height (mm)               | 173   | 163   | 157   | 152   | 147   |
| Rate (kN/m)               | 856   | 1048  | 1134  | 1214  | 1287  |
| Effective Deflection (mm) | 28    | 30    | 33    | 36    | 38    |
| Natural Freq. (Hz)        | 3.03  | 2.82  | 2.72  | 2.62  | 2.52  |
| Maximum OD (mm)           | 241   | 248   | 251   | 256   | 260   |
| Weight (kg)               | 7.69  |       |       |       |       |

