



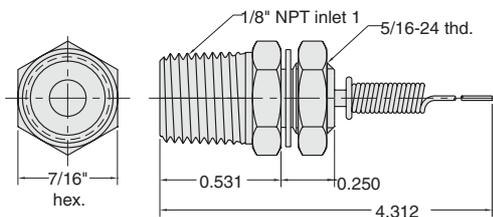

SPECIALTY COMPONENTS

2-Way Normally-Closed Whisker Valve

For use with bleed pressure piloted control circuits. Coil spring stainless steel whisker is easily replaceable and can be formed to different shapes.

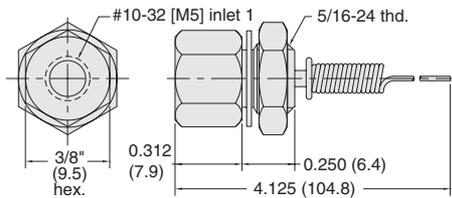

Medium: Air

Input Pressure: 150 psig/10 bar max.


Air Flow: 1.0 scfm @ 50 psig; 1.5 scfm @ 100 psig

Force For Full Stem Travel: 1/4 oz. approx.

Mounting: 5/16-24 male thread. Nut and lockwashers furnished

Bleed: To atmosphere around whisker stem

Whisker: Stainless steel, approx. 3" (76.2) length. Replaceable (Part Number 12375)




Part No.	Description
MWV-1	Normally-Closed Whisker Valve, #10-32
MWV-1-M5	Normally-Closed Whisker Valve, M5
MWV-1P	Normally-Closed Whisker Valve, 1/8" NPT

In-Line Fixed Orifice Air Chokes



Each choke is calibrated for precise flow



Medium: Air

Material: Brass

Working Range: 0 to 300 psig max.

Part No.	Description
MAC-A	Air Choke, 0.0135" Hole, Yellow Disk
MAC-B	Air Choke, 0.010" Hole, Green Disk
MAC-C	Air Choke, 0.0075" Hole, Blue Disk
MAC-D	Air Choke, 0.006" Hole, Red Disk



Quality remains a primary feature of every product Clippard produces. This is achieved through the excellence

in manufacturing practices and craftsmanship that has continued throughout the years. The company motto—Quality People, Quality Products—emphasizes the important role every employee plays in maintaining the company's reputation.