

## **NEW!** MANUALLY-OPERATED AIR VALVES

# **NEW! Push/Pull Valves**



Push/Pull spool valves are available in both 3- and 4-way configurations. The Detent version maintains spool position by friction, while the Momentary spring returns to the home position.


**Operating Pressure:** 0 to 115 psig **Cv:** 0.89


Ports: 1/4" NPT, 1/8" NPT exhaust


Operating Temperature: 32 to 140°F (0 to 60°C)

Mounting: Panel or base mount

Part No.	Description
MMV-P3QD	3-Way, 3 Port Detented Push/Pull Valve
MMV-P4QD	4-Way, 5 Port Detented Push/Pull Valve
MMV-P4QM	4-Way, 5 Port Momentary Push/Pull Valve







### **NEW! Lever Valves**

Lever valves are available in both 3- or 4-way spool valves with 1/4" NPT ports. They have either a Detented or Momentary manual operation.

Operating Pressure: 0 to 150 psig

Cv: Detented: 1.0 Momentary: 0.89


**Port Size:** 1/4" NPT **Number of Ports:** 4

Operating Temperature:  $32 \text{ to } 140^{\circ}\text{F} \text{ (0 to } 60^{\circ}\text{C)}$ 

Mounting: Panel or base mount

Part No.	Description
MMV-L4QD	4-Way, 2-Position Detented Lever Valve
MMV-L4QM	4-Way, 2-Position Momentary Lever Valve
MMV-L3QD	3-Way, 2-Position Detented Lever Valve
MMV-L3QM	3-Way, 2-Position Momentary Lever Valve
MMV-L4QM-C	4-Way, 3-Position Momentary Lever Valve,

Closed Center

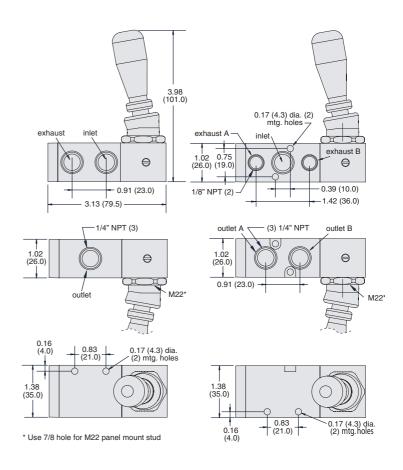

### **NEW!** AIR VALVES



# **NEW! Rotary Valves**



Rotary Valves are 4-way valves with 1/4" NPT ports. They are manually-operated 3-position closed center valves.

Operating Pressure: 0 to 150 psig

Port Size: 1/4" NPT

Cv: 1.68


Number of Ports: 4


Mounting: Base mount

**Operating Temperature:** 32 to 140°F (0 to 60°C)

#### Part No. Description

MMV-R4QN-C 4-Way, 3-Position Non-Detented Rotary Valve MMV-R4QD-C 4-Way, 3-Position Detented Rotary Valve





### **NEW! Foot Pedal Valves**



Foot Pedal Valves are 3- or 4-way valves with 1/4" NPT ports. Two versions are offered; either a low-profile flat pedal or standard pedal with or without guard.

**Operating Pressure:** 0 to 150 psig **Cv:** 1.4

**Ports:** 1/4" NPT **Mounting:** Base mount

Operating Temperature: 32 to 140°F (0 to 60°C)

Part No.	Description
MMV-F3QM-F	3-Way Valve with Flat Pedal
MMV-F4QM-F	4-Way Valve with Flat Pedal
MMV-F4QM	4-Way Valve with Standard Pedal
MMV-F4QM-G	4-Way Valve with Plastic Foot Guard

