



## MODULAR 3-WAY COMBINATION VALVES

### R-321



#### 3-Way Combination Valve

##### Features:

- Indicator shows valve in shaded position
- Multiple porting speeds piping
- Micro gap construction - snap action and no blow by
- Balanced design allows speed control at exhausts

##### Performance:

**Flow:** 9 scfm @ 100 psig; 255 l/min @ 6.9 bars


**Pilot Pressure Minimum:** 40 psig; 2.8 bars

**Temperature:** 32° to 180° F

**Working Pressure:** 0 to 150 psig; 0 to 10.3 bars

##### Description:

R-321 is a 3-way, spring return, fully ported valve with an interconnected shuttle valve in one pilot line to provide two inputs to the pilot. It can be used normally - OPEN, normally - CLOSED, as a diverter, or as a selector. Auxiliary outlet is provided through port 7, which should be plugged if not used.

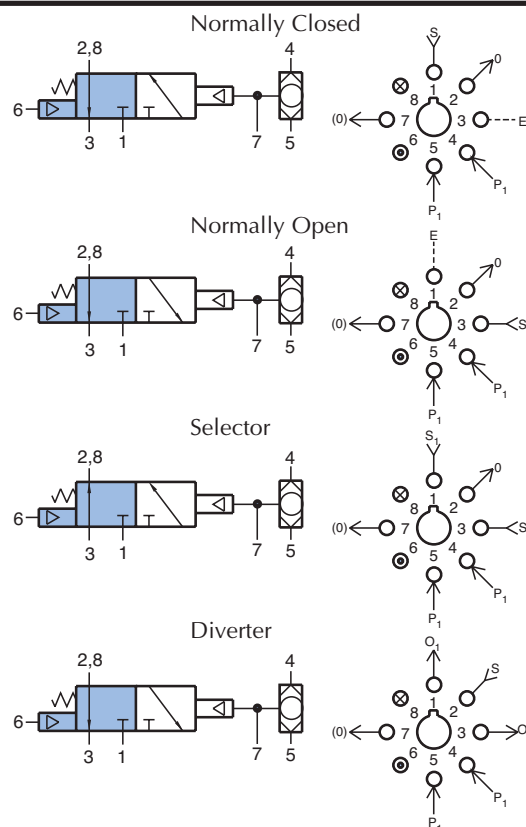

### R-322



#### 3-Way Combination Valve

##### Features:

- Indicator shows valve in shaded position
- Multiple porting speeds piping
- Micro gap construction - snap action and no blow by
- Balanced design allows speed control at exhausts

##### Performance:

**Flow:** 9 scfm @ 100 psig; 255 l/min @ 6.9 bars

**Pilot Pressure Minimum:** 20 psig; 1.4 bars

**Temperature:** 32° to 180° F

**Working Pressure:** 0 to 150 psig; 0 to 10.3 bars

##### Description:

R-322 is a 3-way valve, 2-position, fully ported, with an interconnected shuttle valve in one pilot line to provide two inputs to the pilot. It can be normally-OPEN, normally-CLOSED, as a 2-position selector, or as a 2-position diverter. Auxiliary outlet is provided through port 7, which should be plugged if not used.

