
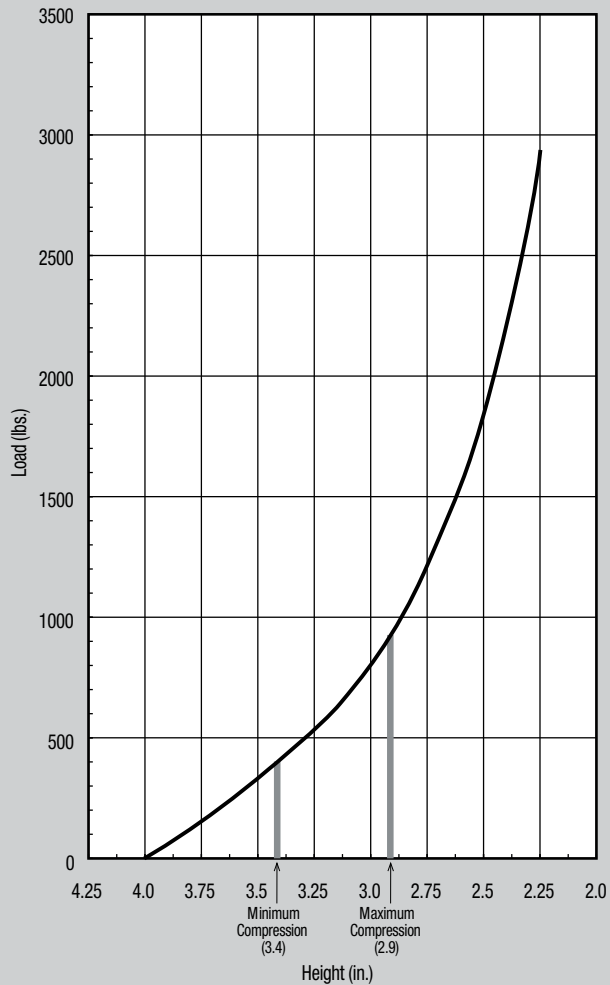


IMPERIAL

| | | | | | |
|----------------------------|------|------|------|------|------|
| Compression (%) | 15 | 20 | 22.5 | 25 | 27.5 |
| Load (lbs.) | 420 | 600 | 690 | 790 | 910 |
| Height (in.) | 3.4 | 3.2 | 3.1 | 3 | 2.9 |
| Rate (lbs./in.) | 720 | 840 | 980 | 1080 | 1340 |
| Effective Deflection (in.) | 0.58 | 0.71 | 0.70 | 0.73 | 0.68 |
| Natural Freq. (CPM) | 246 | 222 | 224 | 220 | 228 |
| Maximum OD (in.) | 3.28 | 3.3 | 3.35 | 3.4 | 3.46 |
| Weight (lbs.) | 0.94 | | | | |

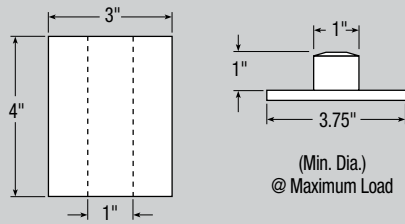

METRIC

| | | | | | |
|---------------------------|------|------|------|------|------|
| Compression (%) | 15 | 20 | 22.5 | 25 | 27.5 |
| Load (kN) | 1.87 | 2.67 | 3.07 | 3.51 | 4.04 |
| Height (mm) | 86 | 81 | 79 | 76 | 74 |
| Rate (kN/m) | 126 | 147 | 171 | 189 | 234 |
| Effective Deflection (mm) | 15 | 18 | 18 | 19 | 17 |
| Natural Freq. (Hz) | 4.10 | 3.71 | 3.73 | 3.66 | 3.80 |
| Maximum OD (mm.) | 83 | 84 | 85 | 86 | 88 |
| Weight (kg) | 0.43 | | | | |

