



BRASS FITTINGS

SWIVEL FITTINGS


Minimatic® swivel connector fittings are very efficient in applications where joints need to be disconnected and reconnected frequently. Made with a threaded connection on one end and a swivel connection on the other, these fittings provide a true cost savings on pneumatic circuit designs. They are valuable also where short lengths of hose are being connected.

Note: These are not rotating joints. They are assembly benefits . . . not to be used as a constant rotation junction.

15040



#10-32 Swivel Fitting



Material: Brass

Thread: #10-32

Seals: Buna-N o-ring (gasket furnished package only)

Use: Allows connection to rotate for tightening in confined spaces

Note: Used for positioning not for rotary connector


Options: (-ENP)



15045



#10-32 to 1/8" I.D. Hose Swivel Fitting

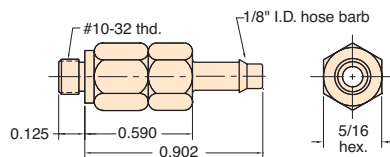

Material: Brass

Thread: #10-32

Seals: Buna-N o-ring (gasket furnished package only)

Use: Allows connection to rotate for tightening in confined spaces

Hose Barb: 1/8" I.D. hose

Note: Used for positioning not for rotary connector


Options: (-ENP)



15050



1/8" NPT to #10-32 Swivel Adapter

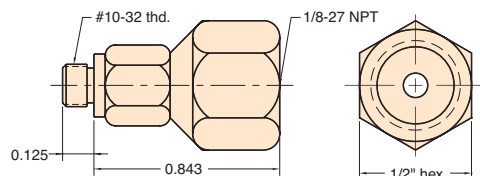

Material: Brass

Thread: #10-32 and tapped for 1/8-27 NPT

Seals: Buna-N o-ring (gasket furnished package only)

Use: Allow connection to rotate for tightening in confined spaces

Note: Used for positioning not for rotary connector


Options: (-ENP)



15055



1/8" NPT to 1/8" I.D. Hose Swivel Fitting

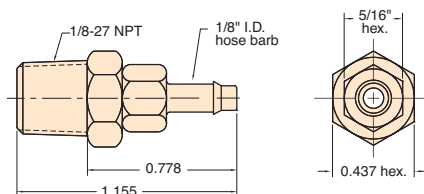

Material: Brass

Thread: 1/8-27 NPT

Seals: Buna-N o-ring

Use: Allows connection to rotate for tightening in confined spaces

Hose Barb: 1/8" I.D. hose

Note: Used for positioning not for rotary connector


Options: (-ENP)



15060



1/8" NPT to #10-32 Swivel Adapter

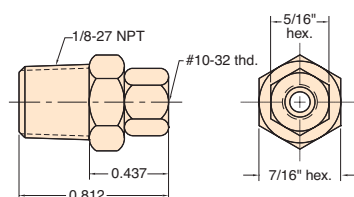

Material: Brass

Thread: 1/8-27 NPT male and #10-32 tapped

Seals: Buna-N o-ring

Use: Allows connection to rotate for tightening in confined spaces.

Note: Used for positioning not for rotary connector

Options: (-ENP)

